

10-20-00

A

10/19/00
 JCS30 U.S. PTO

THE COMMISSIONER OF PATENTS AND TRADEMARKS
 Washington D.C. 20231
 Box Patent Applications

Case Docket No. MITA 17.869
 Filed by Express Mail
 (Receipt No. EL522394728US)
 on October 19, 2000
 pursuant to 37 CFR 1.10
 by Lydia Gonzalez

S I R:

Transmitted herewith for filing is: ☒ a new application
☐ a c-i-p application of S.N. _____ filed _____

Inventor(s): José MURILO MOURÃO; Camilo Carlos DA SILVA;
 Roberto Lúcio NUNES DE CARVALHO; Washington Luiz MAFRA

For **"METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS
 ON FERROUS MATERIALS"**

Enclosed are:

- ☐ _____ sheets of drawings.(Figs.)
☒ Specification, including claims and abstract (11pages)
☐ Declaration
☐ An assignment of the Invention to _____
☐ A certified copy of _____ Application No(s). _____
☒ An associate power of attorney
☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
☒ Post card
☐ Recording fee (as indicated below)
☐ Information Disclosure Statement, PTO-1449, copies of _____ references
☒ Other Preliminary Amendment
☐ Other _____

	Col. 1	Col. 2
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	16-20 =	0
INDEP CLAIMS	1-3 =	0
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

*If the difference in Col. 1 is less than
 zero, enter "0" in Col. 2

SMALL ENTITY	
RATE	FEE
	\$355
x 9 =	\$ 18
x 40 =	\$
x 135 =	\$
TOTAL	\$

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$710
x 18 =	\$
x 80 =	\$
x 270 =	\$
TOTAL	\$

- ☐ Please charge our Deposit Account No. 08-1634 the amount of _____ to cover the filing fee
 and recording fee (if any)
☐ A check in the amount of \$ _____ to cover the filing fee and the recording fee (if any) is enclosed.
☐ The Commissioner is hereby authorized to charge payment of any fee associated with this communication or
 credit overpayment to Deposit Account No. 08-1634. A duplicate copy of this sheet is enclosed.

Respectfully Submitted,

Helfgott & Karas, P.C.
 60th Floor
 Empire State Building
 New York, New York 10118-6098
 (212)643-5000

Date: 10/19/00

Any fee due with this paper, not fully
 covered by an enclosed check, may be
 charged on Deposit Acct No. 08-1634

Leonard Cooper
☐ Aaron B. Karas, Reg. No. 18,923
☐ Samson Helfgott, Reg. No. 23,072
☒ Leonard Cooper, Reg. No. 27, 625
☐ Linda S. Chan, Reg. No. 42,400
☐ Harris A. Wolin, Reg. No. 39,432
☐ Brian S. Myers, Reg. No. 46,947

JCS12 U.S. PTO
 09/692824
 10/19/00

09692824-101900

THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of : José MURILO MOURÃO et al.

Filed : Concurrently herewith

For : "METHOD TO INCREASE THE ADHERENCE OF
COATING MATERIALS ON FERROUS
MATERIALS"

Serial No. : Concurrently herewith

October 19, 2000

Assistant Commissioner of Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

S I R:

Prior to examination please amend the application as follows:

IN THE CLAIMS:

Please amend the following claims:

Claim 5, lines 1 and 2, change "any one of claims 1 or 2 or 3 or 4" to --claim 1--.

Claim 16, line 1, change "according to claims 1 or 15" to --claim 1--.


R E M A R K S

This amendment is being submitted to avoid improper multiple dependent claims.

Favorable consideration is respectfully solicited.

Any fee due with this paper, not fully covered by an enclosed check, may be charged on Deposit Acct. No. 08-1634

Respectfully submitted,


Leonard Cooper
Reg. No. 27,625

HELFGOTT & KARAS
EMPIRE STATE BUILDING - 60th Floor
NEW YORK, NEW YORK 10118-6098
(212) 643-5000
DOCKET NO.: MITA17.869
Lhh:preliminary

Filed by Express Mail
(Receipt No. EL52394 2815)
on 10/19/00
pursuant to 37 C.F.R. 1.10.
by Leonard Cooper

Disclosure of the Invention

The present specification is directed to a method to increase the adherence of coating materials on ferrous minerals.

5 The purpose of this method to increase the adherence is the use of the properties of certain materials to fix more efficiently the coating on ferrous materials in general and on ferrous minerals and/or on iron ores and/or on agglomerates, in order to reduce or even eliminate the sticking or formation of clusters during the reduction of said material(s).

10 Basically, the method to increase the adherence of coating materials comprises the contact of the iron-containing reducible material with a dispersion of at least a particulate non-pozzolanitic material which can be generally referred to as a material that cannot be hardened in the presence of water and at least a particulate pozzolanitic material which can be referred to as a material that can be
15 hardened in the presence of water, before all the material is submitted to the reduction step.

As it known by those skilled in the art, the coating or revestment of ferrous minerals and/or on iron ores and/or on agglomerates thereof for decreasing the sticking during reduction of said material(s) has been widely carried out.
20 However, a certain difficulty in maintaining the coating material adhered to the surface of the material has been detected especially when it undergoes a more intense handling, such as, for example, when the coating is made before the ore is sent to the consumer.

Therefore, one of the objects of the present invention is to provide a
25 method to increase the adherence of coating materials thus eliminating the existing drawbacks in the conventional processes known up to now.

This and other objects and advantages of the present invention are attained by a method to increase the adherence of coating materials made of ore, which method comprises the step of: before the direct reduction of the ore
30 and/or on agglomerates thereof, contacting same with a dispersion containing at

least a particulate material, thus forming a composite coating of at least a material that cannot be substantially hardened in the aqueous mean and at least a material that can be hardened in the aqueous mean. With that type of coating, the agent that can be hardened assures that the particles of the material that cannot be hardened adhere to the surface of the material containing iron (ore). Thus, the stability of the coating film can be attained, even when submitted to handling and transporting operations of the coated materials, what can reduce the formation of agglomerates in direct reduction reactors.

Also, in another variant of the operating step, the method to increase the adherence of coating materials of ore in general comprises the step of contacting an iron-containing reducible material with a dispersion containing particulate materials, through dipping, spraying or sprinkling.

The present invention will be described in details as follows and according to non-limiting examples for a better understanding of its inventive concept. Thus, the method to increase the adherence of coating materials on ferrous minerals in general comprises contacting an iron-containing reducible material with a dispersion containing bentonite or any aluminum-containing clay and a material that can be hardened in an aqueous mean, such as a cement. In another embodiment, the method comprises, before the reduction is carried out in iron-making reactors, contacting agglomerates of an iron-containing reducible material with an effective amount of at least a particulate material that can reduce the formation of agglomerates.

By reducing the formation of agglomerates inside the furnaces, a more efficient operation of the direct reduction furnace is assured, besides allowing the operation at more elevated temperatures, thus allowing a greater outflow of material the result of which is a higher productivity of the furnace.

It should be emphasized here that the iron-containing reducible material used in the present invention can be in any form that makes it possible to process same in a direct reduction furnace.

In a non-limiting way, the iron-containing reducible material can be defined

by a cold or hot agglomerate, such as pelletized, sintered, bricketed, granulated, and the like. Also it can be in the form of lump ore, granulated ore, fine ore, concentrated ore, and the like.

The dispersion used here consists of a composition or mixture of divided,
5 finely divided and/or crushed solid material, sprayed on a liquid mean. In this text, slurries and suspensions are also regarded as suspensions.

In the method to increase the adherence of coating materials made of ores in general, the particulate material used is of the type that cannot be hardened in an aqueous mean, and therefore a divided, finely divided and/or
10 crushed material capable of forming a dispersion in a liquid mean, besides being substantially inert to the hardening when mixed with water.

Preferably, the particulate material is comprised of an aluminum compound and/or an aluminum-containing source, such as bentonite and bauxite. In a preferred option, an aluminum-containing particulate material based
15 on bauxite and/or aluminum-containing clay is used.

As examples of aluminum-containing clays, bentonite, kaolin ores, bauxite-containing kaolins, bauxite, bauxite- and gibbsite-containing clays, gibbsite, montmorillonites, chlorites, clauquites, amorphous and variable clays, high-alumina clays such as diaspore clays. It should be stressed that,
20 alternatively, synthetic sodium and aluminum silicates can be advantageously used, and that all particulate materials can be used in either the hydrated or non-hydrated form.

Similarly, in the method to increase the adherence of coating materials made of ore in general, if the particulate material used is of the type that can be
25 hardened in an aqueous mean, it should be a divided, finely divided and/or crushed material capable of forming a dispersion in a liquid mean and can be substantially hardened when mixed to water. Preferably, the particulate material is comprised of cement, such as, in a non-limiting example, Portland cement and pozzolanic cements; also, it is possible to use other types of agents that can be
30 hardened in an aqueous mean without any restriction.

Within this context, the size of the particulate material in the dispersions is determined by its type and ability to form a dispersion in the selected mean. Thus, the average size of the particulate material is in general in the range of between 0.01 micrometer and 500 micrometers, an optimum average size ranging from 0.05 micrometers and 100 micrometers.

The method to increase the adherence of coating materials made of ores in general can use a dispersion containing several materials and/or additives, besides the ones mentioned previously, that are conventionally used to improve the metallurgic properties of the pellet. The non-limiting examples include: olivine, serpentine, magnesium, caustic, coke and the like. Again, the particle size of this material should be within the same range of the particulate materials.

In the accomplishment of the method to increase the adherence of coating materials made of ore in general, several techniques can be used to contact the iron-containing reducible material with the particulate material. Preferably, the processes used involve the formation of a dispersion (slurry, suspension, and the like) of the particulate materials.

Such dispersions, suspensions and/or slurries are formed with the aid of a liquid mean including in a non-limiting example, water, organic solvents, solutions/dispersions of water-soluble polymers, water-dispersible materials (in a non-limiting example, to improve the dispersion or even increase the efficiency of the coating material adhesion).

Thus, the iron-containing reducible material is then contacted with the resultant dispersion, suspension and/or slurry, wherein said contact can be effected, for example, through sprinkling, spraying and/or dipping, and it can also be a partial or complete procedure.

The iron-containing reducible material can also be contacted with a dispersion containing the above mentioned particulate material, at any time before the reduction takes place. In the event the iron-containing reducible material is supplied as pellets, the dispersion can be applied to burnt pellets, in a step between the process for producing same and its use in the reduction

reactors.

Thus, the effective amount that causes the reduction in the formation of agglomerates also varies depending on different factors known by those skilled in the art. Amongst such factors, the type of iron-containing reducible material; its physical form; its humidity content; the type of specific particulate material used; its form and other physical characteristics; the dispersion mean, the operating conditions of the direct reduction furnace, and the like, can be mentioned.

Although the effective amount of particulate material that reduces the formation of agglomerates is a non-limiting item, it is typically over 0.01% by weight, based on the dry weight of the iron-containing reducible material, after the contact with the particulate material.

Preferably, the particulate material is present in the range from 0.01% by weight to approximately 2% by weight in relation to the dry base metric ton of material to be coated.

A typical dispersion contains from 1 to 80% by weight of particulate material, the balance being comprised of the dispersion mean, such as water. As a non-limiting example, bauxite and Portland cement are used as particulate materials, in a typical aqueous dispersion within the range of about 10% by weight to about 80% by weight of solid materials in water, and preferably 5% by weight to 40% by weight. The ratio between the material that cannot be hardened in an aqueous mean and the material that can be hardened may range from about 5 to 40%, preferably about 20%, that is, a 1:20 ratio between the agent that can be hardened and agent that cannot be hardened.

Depending on the contact conditions, bauxite and Portland cement are present in the iron-containing reducible material in the range from between 0.01% by weight and 1% by weight.

Non-limiting examples for accomplishing the method are given below, in which:

By using iron ore pellets, the following test was carried out:

- reference dispersion in water: % by weight of solids = 15% bauxite;

- test dispersion in water: % by weight of solids = 15% (equivalent to 7.5% bauxite and 7.5% Portland cement);

- dispersion applied on the pellets as a spray;

- variable: equivalent coating rate (kg of total solids sprayed/metric ton of pellets);

- tumbling test after coating, to evaluate the adherence of the coating film according to ISO 3271, part 2 standard;

- sticking test according to ISO 11256 standard;

- chemical composition of the pellet sample tested:

Fe: 68.0%; SiO₂: 1.20%; Al₂O₃: 0.50%; CaO: 0.70; Mg: 0.25%.

Results obtained:

Tests	Coating	INITIAL equivalent coating rate (kg of sprayed solids/metric ton of pellets)	Coating rate AFTER TUMBLING (kg of sprayed solid/metric ton of pellets)	Pellets sticking rate(%)
References	No coating	0,0	0,0	98,3
	Coated with a dispersion containing water and bauxite	0,5	0,26	79,2
		1,0	0,48	63,5
		1,5	0,79	58,7
		2,0	1,05	43,8
Proposed method	Coated with a dispersion containing water and bauxite and Portland cement	0,5	0,46	58,4
		1,0	0,89	44,2
		1,5	1,39	13,6
		2,0	1,88	4,2

Claims

1- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, comprising the step of: before the reduction of the ore and/or iron-containing substances, contacting same with an amount of dispersion containing at least a material that cannot be substantially hardened in an aqueous mean and at least a material that is able to harden in the aqueous mean, thus forming an efficient coating that remains in the material even with a heavy handling of same and can reduce the formation of agglomerates in iron-making reactors.

2- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, according to claim 1, further comprising the step of contacting an iron-containing reducible material with a dispersion of particulate materials, through dipping, spraying or sprinkling.

3- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, according to claim 1, comprising the contact of an iron-containing reducible material with a dispersion that contains a clay or argillaceous material as the non-hardenable material and a cement as the material that can be hardened in an aqueous mean.

4- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, according to claim 1, comprising the contact of agglomerates with an iron-containing reducible material with an effective amount of at least a particulate material that cannot be hardened in water and a material that can be hardened in water that can reduce the formation of agglomerates in the reactor.

5- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, according to any of claims 1 or 2 or 3 or 4, wherein the iron-containing reducible material is defined by a cold or hot agglomerate, such as pelletized, sintered, bricketed, granulated, and the like; also being defined by an ore in natural wild form, such as lump ore, granulated ore, fine ore, concentrated ore, and the like.

6- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, according to claim 1, wherein the

particulate material used is of the type that cannot be hardened in an aqueous mean, and therefore a divided, finely divided and/or crushed material capable of forming a dispersion in a liquid mean, besides being substantially inert to the hardening when mixed with water.

5 7- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, according to claim 1, comprising an aluminum compound and/or an aluminum source, such as bentonite and bauxite.

10 8- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, according to claim 1, wherein a particulate material based on bauxite and/or aluminum- containing clay is used.

15 9- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, according to claim 8, wherein the aluminum-containing clay is of the type defined by the group consisting of bentonite, kaolin ores, bauxite-containing kaolins, bauxite, bauxite- and gibbsite- containing clays, gibbsite, montmorillonites, chlorites, clauquites, amorphous and variable clays, high alumina clays such as diaspore clays; wherein synthetic sodium and aluminum silicates can be used and all particulate materials can be used in either the hydrated or the non-hydrated form.

20 10- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, according to claim 1, wherein the particulate material used is of the type that can be hardened in an aqueous mean and the divided, finely divided and/or crushed type capable of forming a dispersion in a liquid means and can be substantially hardened when mixed with
25 water; said particulate material being comprised of Portland cement and pozzolanic cement.

30 11- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, according to claim 1, wherein the size of the particulate material in the dispersions is determined by its type and capacity of forming a dispersion in the selected mean; the average size of the particulate material generally ranging from between 0.01 micrometer and 500

micrometers, an optimum average size ranging from between 0.05 micrometers and 100 micrometers.

12- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, according to claim 1, wherein the
5 particulate material is present in a range from 0.01% by weight to approximately 2% by weight in relation to the dry base metric ton of the material to be coated.

13- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, according to claim 1, wherein the
10 particulate material is present in a typical dispersion comprising from 1 to 80% by weight of particulate material, the balance being defined by the dispersion mean, such as water.

14- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, according to claim 13, wherein the
15 particulate material is present in a typical aqueous dispersion comprising from 10% by weight to approximately 80% by weight of solid materials in water, the balance

15- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, according to claim 14, wherein the
20 particulate material is present in a typical aqueous dispersion preferably comprising from approximately 5% by weight to 40% by weight of solid materials in water, the balance being defined by the dispersion mean, such as water.

16- METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS ON FERROUS MATERIALS, according to claim 1 or 15, wherein
25 the particulate materials are present in a dispersion wherein the ratio between the material that cannot be hardened in an aqueous mean and the material that is able to be hardened in an aqueous mean may range from approximately 5 to 40%, preferably about 20%, that is, a 1:20 ratio between the agent that can be hardened and the agent that cannot be hardened.

Abstract

METHOD TO INCREASE THE ADHERENCE OF COATING MATERIALS
ON FERROUS MATERIALS, comprising the step of: before the reduction of iron
ores and/or on the agglomerates thereof, contacting same with a dispersion
5 containing at least a particulate material, thus forming a composite coating of at
least a material that cannot be substantially hardened in the aqueous mean and
at least a material that can be hardened in the aqueous mean.

THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of: Jôse MURILO MOURAO et al.

Filed : concurrently herewith

For : "METHOD TO INCREASE THE ADHERENCE OF COATING
MATERIALS ON FERROUS MATERIALS"

Serial No. : concurrently herewith

October 19, 2000


Assistant Commissioner of Patents
Washington, D.C. 20231

SUB-POWER OF ATTORNEY

S I R:

I, Samson Helfgott, Reg. No. 23,072 attorney of record
herein, do hereby grant a sub-power of attorney to Leonard
Cooper, Reg. No. 27,625, Linda S. Chan, Reg. No. 42,400, Harris
A. Wolin, Reg. No. 39,432 and Brian S. Myers, Reg. No. 46,947 to
act and sign in my behalf in the above-referenced application.

Respectfully submitted,

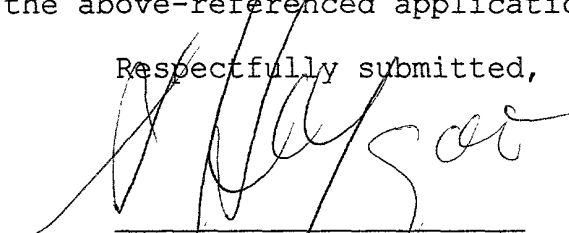

Samson Helfgott
Reg. No 23,072

HELFGOTT & KARAS, P.C.
60th FLOOR
EMPIRE STATE BUILDING
NEW YORK, NY 10118
DOCKET NO.: MITA 17.869

Filed by Express Mail
(Receipt No. FLS323542815)
on 10/19/00
pursuant to 37 C.F.R. 1.10.
[Signature]

Any fee due with this paper, not fully
covered by an enclosed check, may be
charged on Deposit Acct. No. 08-1634

005707 42325960